PARTS LIST

The Group Assembly Parts Lists are listed in disassembly order. The list divides the components into major assemblies, their subassemblies and parts. By the use of indented columns, the relationship of the assemblies to the subassemblies and parts is obtained.

The column titled "Figure and Index No." contains the index number in disassembly order of the items illustrated. Do not use the figure or index number in correspondence--specify the catalog or part number and name. Finish should also be included where specified.

The column titled "nomenclature" (including numbered columns) lists item nomenclature on the Graflex drawing. The assembly in the column marked "3" will be a component of the first assembly which preceded it in the column marked "2" etc. The code "NP" will indicate that this part is "not procurable" and that the "next higher assembly" (NHA) should be ordered. The code "AR" is used for bulk items when an indefinite amount may or may not be used "as required. The code "LP" is used when an item may be "locally purchased."

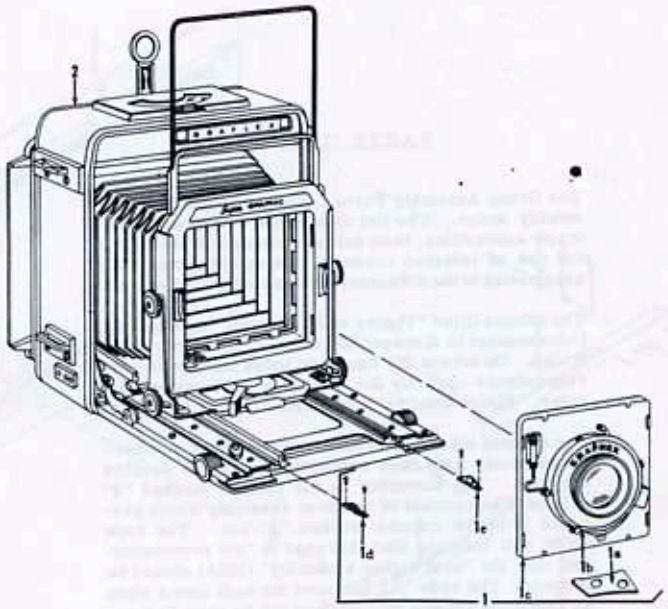

Figure 1. CAMERA COMPLETE - SUPER GRAPHIC

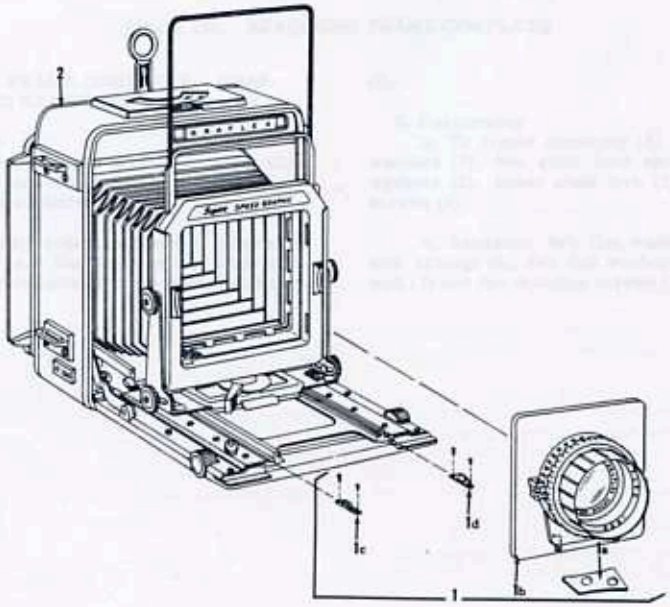

Figure 1A. CAMERA COMPLETE - SUPER SPEED GRAPHIC

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
1-	Ref.	CAMERA COMPLETE - SUPER GRAPHIC	1
-1	Ref.	. Lens Kit Complete	1
-1a	Ref.	. . Cam - Lens (see note below)	1
-1b	Ref.	. . Lens in shutter (as selected)	1
-1c	Ref.	. . Lensboard Complete - Super Graphic (see Section 8A)	1
-1d	30655-G1	. . Stop Assembly - Right (includes screws)	1
-1e	30655-G2	. . Stop Assembly - Left (includes screws)	1
	30661	. . . Screw - Stop Assembly (pointed, rear)	2
	30662	. . . Screw - Stop Assembly (flat, front)	2
-2	36000-G2G	. Camera Basic (over serial no. 646124) Figure 2	Ref.
	36000-G1	. Camera Basic (up to serial no. 646124) Figure 9	Ref.

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
1A-	Ref.	CAMERA COMPLETE - SUPER SPEED GRAPHIC	1
-1	Ref.	. Lens Kit Complete	1
-1a	Ref.	. . Cam - Lens (see note below)	1
-1b	Ref.	. . Graflex 1000 Shutter (see Section 8D)	1
-1c	30655-G1	. . Stop Assembly - Right (includes screws)	1
-1d	30655-G2	. . Stop Assembly - Left (includes screws)	1
	30661	. . . Screw - Stop Assembly (pointed, rear)	2
	30662	. . . Screw - Stop Assembly (flat, front)	2
-2	36000-G2S	. Camera Basic (Figure 2)	Ref.

NOTE: The cam is selected after the lens has been optically measured for actual focal length (lens travel). If replacement cam is required, refer to cam procurement below.

CAM PROCUREMENT

1. Order by part number if known (stamped on cam) otherwise, refer to 2 and 3 below.

2. Determine the actual focal length of the lens, by optical measurement (to the nearest .001 of an inch). Specify this information when ordering, and use proper Catalog Number listed below.

3. In the event information in 2 above cannot be supplied, return the lens to the nearest Graflex Service Department, where the optical measurement will be determined and the proper cam supplied. See page 45 for address of nearest Graflex Service Department.

Cat. #3021 Cam - Standard, lenses of focal length of 90mm and from 127mm to 165mm inclusive plus 202mm and telephoto lenses of 25cm, 27cm, (270mm) and 38cm focal length

Cat. #3022 Cam - Special, lenses of focal length other than those included in listing of Cat. #3021 and falling within the range of 88mm and 380mm

Cat. #9473 Collimation Service (applicable when par. 3 under Cam Procurement is required)

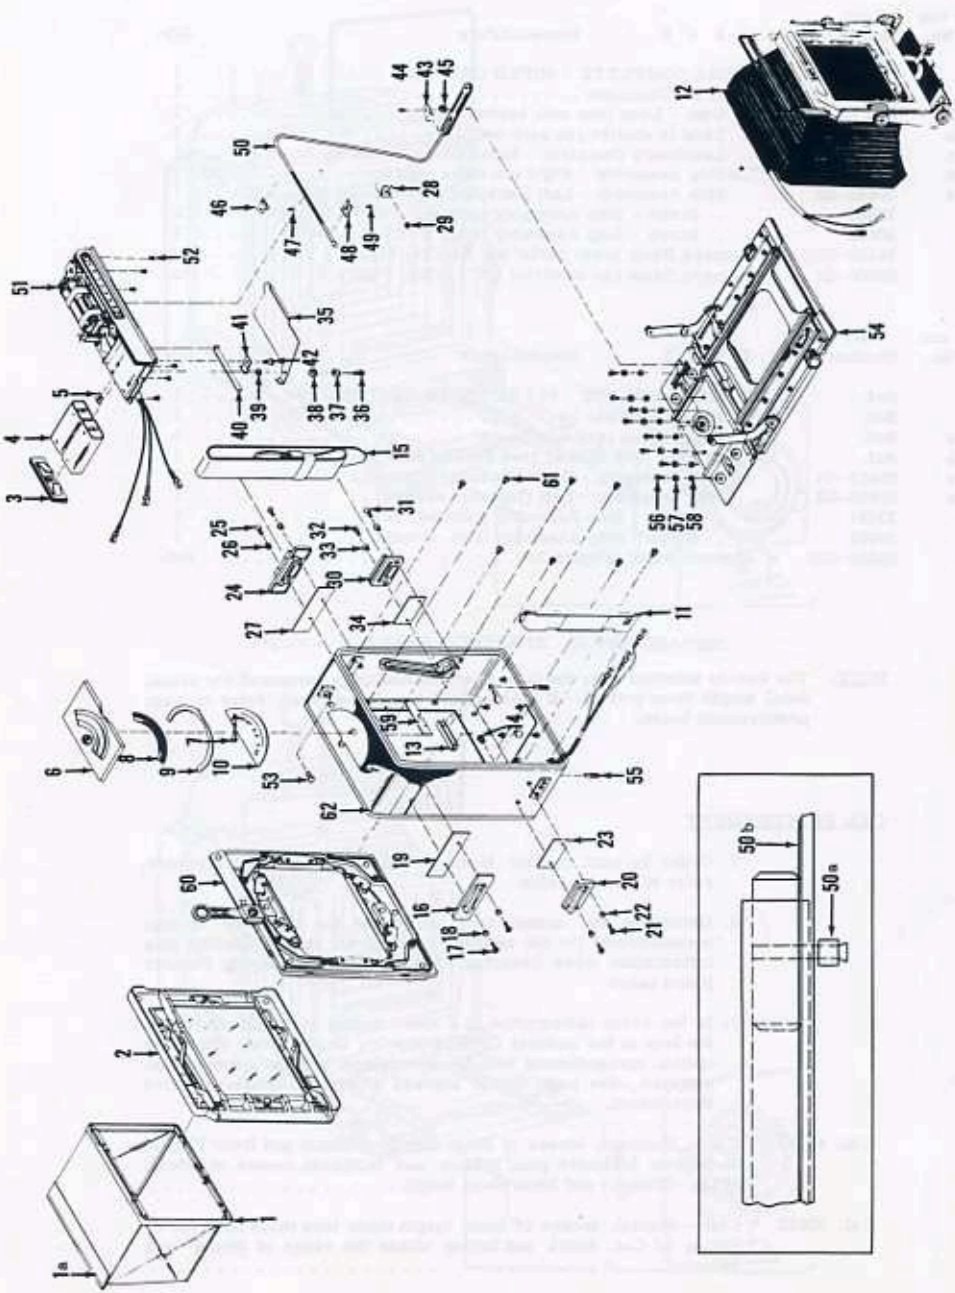

Figure 2. CAMERA BASIC (over serial No. 646124)

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
2-	36000-G2G		CAMERA BASIC - SUPER GRAPHIC (over serial no. 646124)	Ref.	
	36000-G2S		CAMERA BASIC - SUPER SPEED GRAPHIC	Ref.	
-1	36082-G1	.	Hood Assembly - Focusing	1	
-1a	36087-P1	. .	Clip - Dark Slide	1	
-2	36073-G1	.	Frame Assembly - Focusing (Figure 3)	1	
-3	36198-G1	.	Cover Assembly - Battery Compartment	1	
-4	33111	.	Battery, 22-1/2 v., flat type, Eveready Cat. #412 or equal.	2	LP
-5	36328-P1	.	Clip - Retainer	1	
-6	36176-G1	.	Cover Assembly - Focusing Scale	1	
-7	36002	.	Indicator - Focusing Scale	1	
-8	36001-P1	.	Guide - Exposure	1	
-9	36197-P1	.	Spring - Exposure Guide	1	
-10	36213-P1	.	Plate - Focusing Scale	1	
-11	36341-G1	.	Cover Assembly - Terminal Board	1	
-12	36096-G2	.	Standard Complete - Front (Super Graphic) Figure 4	1	
	36096-G3	.	Standard Complete - Front (Super Speed Graphic) Figure 4	1	
	Attaching Part				
-13	32459	.	Clip - Bellows	6	
	---***---				
-14	36340	.	Stud - Terminal Board Cover	1	
-15	36006-P1	.	Handle	1	
-16	36021-P1	.	Bracket - Handle, Upper (right side)	1	
	Attaching Parts				
-17	100-4R6E	.	Screw - Machine, 3/8 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate (See note #1).	2	
-18	36231	.	Washer - Insulating, Parker-Kalon #106, nylon.	2	
-19	---***---				
-19	36227-P1	.	Insulator - Handle Bracket.	1	
-20	36021-P2	.	Bracket - Handle, Lower (right side).	1	
	Attaching Parts				
-21	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate (See note #1).	2	
-22	36231	.	Washer - Insulating, Parker-Kalon #106, nylon.	2	
	---***---				
-23	36227-P2	.	Insulator - Handle Bracket.	1	
-24	36021-P1	.	Bracket - Handle, Upper (left side)	1	
	Attaching Parts				
-25	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate (See note #1).	2	
-26	36231	.	Washer - Insulating, Parker-Kalon #106, nylon.	2	
	---***---				
-27	36227-P1	.	Insulator - Handle Bracket.	1	
-28	36193-P2	.	Clamp	1	
	Attaching Part				
-29	200-4HL	.	Nut - Machine, #4 hex., steel, black oxide (See note #2)	1	
	---***---				
-30	36021-P2	.	Bracket - Handle, Lower (left side).	1	
	Attaching Parts				
-31	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate (See note #1).	1	
-32	100-4R6E	.	Screw - Machine, 3/8in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate (See note #1).	1	
-33	36231	.	Washer - Insulating, Parker-Kalon #106, nylon.	2	
	---***---				
-34	36227-P2	.	Insulator - Handle Bracket.	1	
-35	36092-P1	.	Cover - Cam	1	
	Attaching Parts				
-36	116-2-6W	.	Screw - Machine, 3/8 in. lg., #2-56 pan head, slotted, steel, black oxide & lacq.	1	
-37	36244	.	Collar - Cam Cover	1	
-38	30540-P2	.	Washer - Spring.	1	
	---***---				

NOTE:
1. Thread forming screw p/n 141-4R6H replaces machine screws 17, 21, 25, 31 & 32.
2. Flat washer p/n 33500-65L is used with machine nut item 29.

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
2-39	30473-P25L	.	Washer - Flat, 0.281 in. OD x 0.093 in. ID x 0.012 in. thk., steel black oxide	1
-40	36130	.	Spring - Cam Cover	1
-41	36193-P1	.	Clamp	1
	Attaching Part			
-42	36128	.	Stud - Cam Cover Spring	1
	---***---			
-43	36193-P1	.	Clamp	1
	Attaching Part			
-44	102B3-4K	.	Screw - Machine, 1/4 in. lg., #3-48, round head, slotted, brass, oxide black (See Note)	1
	---***---			
-45	33500-P36	.	Washer - Flat, 0.312 in. OD x 0.128 in. ID x 0.062 in. thk., phenolic	1
-46	34723-P2	.	Clamp	1
	Attaching Part			
-47	102-3-2W	.	Screw - Machine, 1/8 in. lg., #3-48, round head, slotted, steel, black oxide & lacq. (See Note)	1
	---***---			
-48	36193-P2	.	Clamp	1
	Attaching Part			
-49	102-3-2W	.	Screw - Machine, 1/8 in. lg., #3-48, round head, slotted, steel, black cadmium plate (See Note)	1
	---***---			
-50	34739-G2	.	Tube Assembly - Rangefinder	1
-50a	36009	.	. Collar - Pin	1
-50b	36195	.	. Slide - Rangefinder Actuating	1
-51	36145-G2	.	Housing Complete - Rangefinder (Figure 5)	1
	Attaching Part			
-52	116-2-2A	.	Screw - Machine, 1/8 in. lg., #2-56, pan head, slotted, steel, cadmium plate	6
	---***---			
-53	36023-P1	.	Button - Shutter Release (0.547 in. lg.)	1
	36023-P2	.	Button - Shutter Release (0.501 in. lg.)	1
	36023-P3	.	Button - Shutter Release (0.591 in. lg.)	1
-54	36035-G1	.	Bed Complete (Super Graphic) Figure 6	1
	36035-G3	.	Bed Complete (Super Speed Graphic) Figure 6	1
	Attaching Parts			
-55	182A6-4	.	Pin - Groov, 1/4 in. lg., 1/8 in. dia., Groove-Pin Corp. Type #3, chrome vanadium steel	2
-56	116-2-4C	.	Screw - Machine, 1/4 in. lg., #2-56, pan head, slotted, steel, chrome plate	8
-57	221-2L	.	Washer - Lock, internal tooth, for #2 screw, Shakeproof Cat. #1202, steel, black oxide	8
-58	30473-P44K	.	Washer - Flat, 0.250 in. OD x 0.099 in. ID x 0.025 in. thk., brass, oxide black	8
	---***---			
-59	36211-P3	.	Insulator	1
-60	36060-G1	.	Back Assembly (Figure 7)	1
	Attaching Part			
-61	110-6R-3W	.	Screw - Machine, 3/16 in. lg., #6-32, straight side binding head, steel, black oxide	8
	---***---			
-62	36020-G2	.	Body Complete (Figure 8)	1

NOTE: Flat Washer p/n 33500-65L (1 req.) used with screws 44, 47 & 49 not shown.

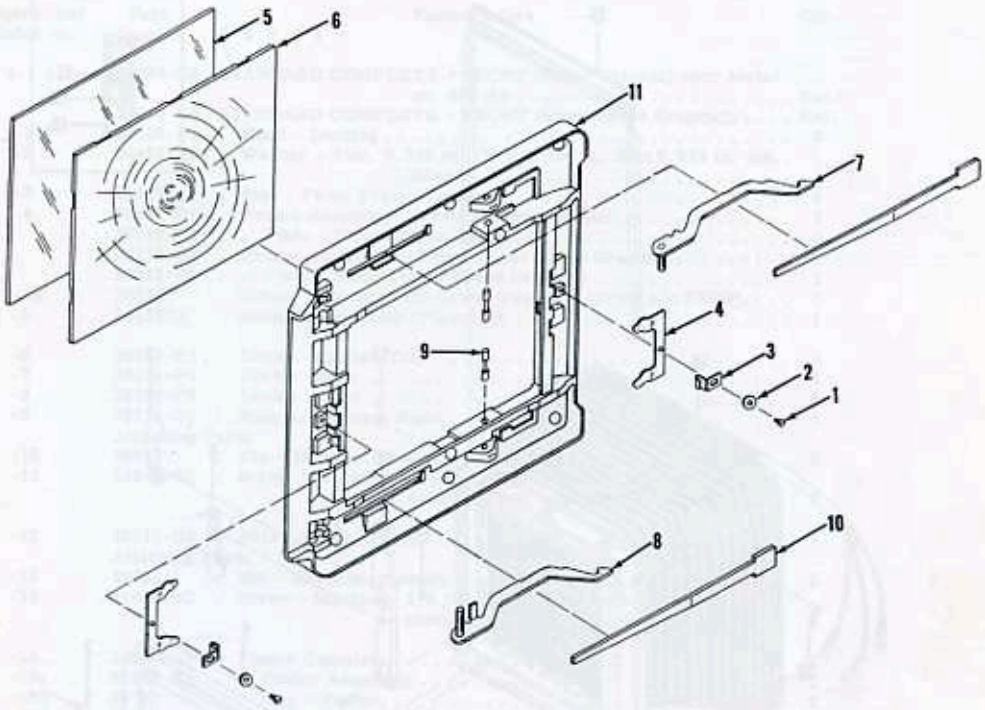

Figure 3. FOCUSING FRAME ASSEMBLY

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
3-	36073-G1		FRAME ASSEMBLY - FOCUSING	Ref.	
-1	116-2-3A	.	Screw - Machine, 3/16 in. lg., #2-56, pan head, slotted, steel, cadmium plate	2	
-2	30473-P25L	.	Washer - Flat, 0.281 in. OD x 0.093 in. ID x 0.012 in. thk., steel, black oxide	2	(no longer used)
-3	36076	.	Retainer - Focusing Hood	2	
-4	36075-P1	.	Retainer - Focusing Screen	2	
-5	30414-P1	.	Screen - Ground Glass	1	
-6	31935-P1	.	Screen - Ektalite	1	
-7	36079-G1	.	Arm Assembly - Upper	1	
-8	36079-G2	.	Arm Assembly - Lower	1	
-9	36077	.	Pin - Spring	2	
-10	36078	.	Spring - Arm Assembly	2	
-11	36074-P1	.	Frame - Focusing	1	

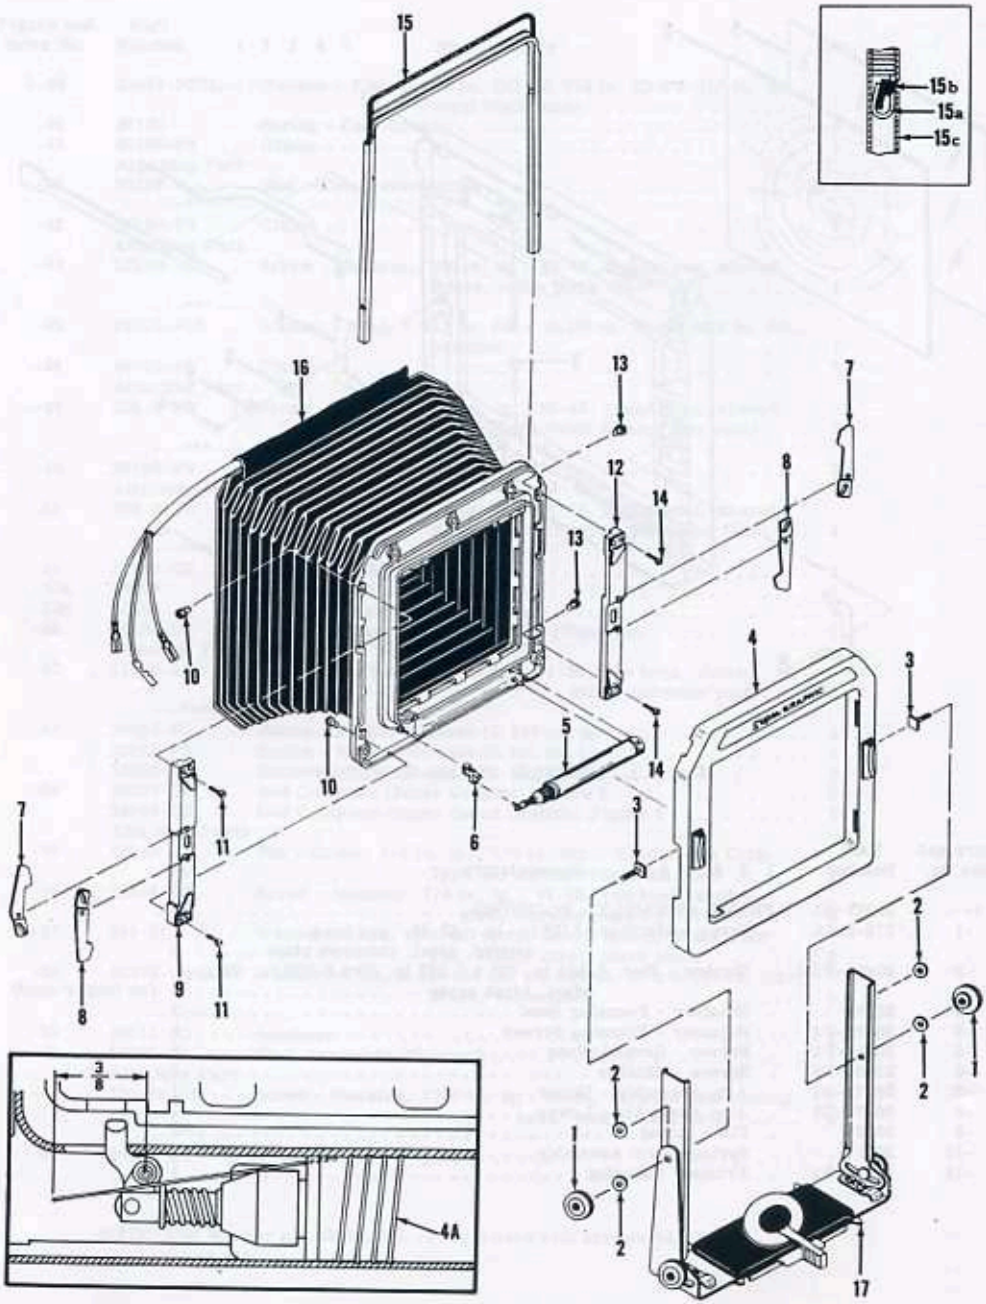

Figure 4. FRONT STANDARD COMPLETE

Figure and Index No.	Part Number	Nomenclature 1 2 3 4 5	Qty.
4-	36096-G2	STANDARD COMPLETE - FRONT (Super Graphic) over serial no. 646124	Ref.
	36096-G3	STANDARD COMPLETE - FRONT (Super Speed Graphic)	Ref.
-1	36105-P1	. Knob - Locking	2
-2	30473-P6	. Washer - Flat, 0.312 in. OD x 0.128 in. ID x 0.015 in. thk., fiber	4
-3	36127	. Stud - Front Frame Locking	2
-4	36117-G1	. Frame Assembly - Front (Super Graphic)	1
	36212-P1	. . Plate - Name (Super Graphic)	1
	36117-G2	. Frame Assembly - Front (Super Speed Graphic)	1
	36212-P2	. . Plate - Name (Super Speed Graphic)	1
-4A	36378	. Spring - Shutter Trip Crank (replaces spring p/n 36258)	1
-5	36133G1	. Solenoid Assembly (Figure 4A)	1
-6	36123-P1	. Crank - Shutter Trip	1
-7	36124-P1	. Lock - Upper	2
-8	36124-P2	. Lock - Lower	2
-9	36113-G1	. Stile Assembly - Right	1
	Attaching Parts		
-10	36043	. Nut - Machine (special)	2
-11	116-2-6C	. Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	2
	---***---		
-12	36113-G2	. Stile Assembly - Left	1
	Attaching Parts		
-13	36043	. Nut - Machine (special)	2
-14	116-2-6C	. Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	2
	---***---		
-15	34848-G3	. Finder Complete	1
-15a	34785-G1	. . Finder Assembly	1
-15b	34787	. . Stop - Finder	2
-15c	34795-P3	. . Frame - Finder	1
-16	36125-G2	. Bellows Complete (Figure 4B)	1
-17	36178-G1	. Standard Assembly - Front (Figure 4C)	1

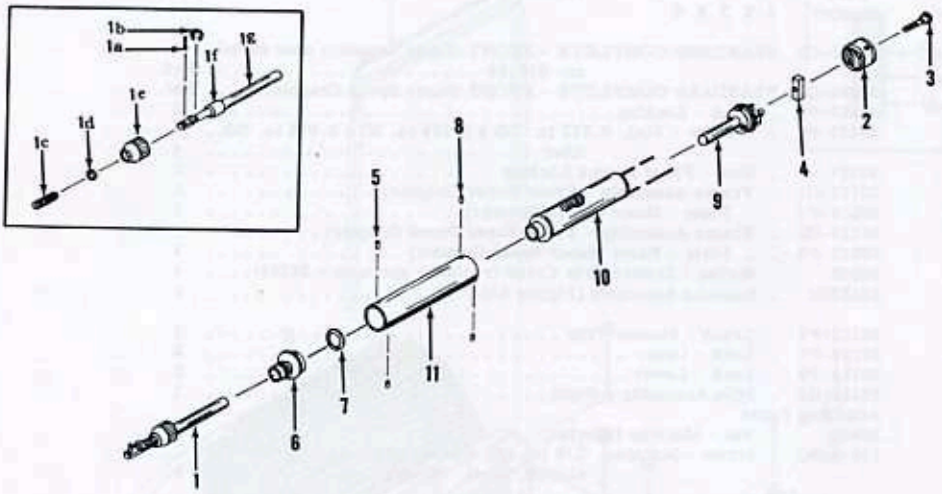

Figure 4A. SOLENOID ASSEMBLY

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
4A-	36133-G1	SOLENOID ASSEMBLY	Ref.
-1	36194-G1	. Plunger Assembly	1
-1a	35439-P2	. . Shaft - Plunger	NP NHA
-1b	251-8	. . Ring - Retaining, Waldes-Kohinoor Cat. #X5133-14, steel	1
-1c	36122	. . Spring - Plunger	1
-1d	30473-P19	. . Washer - Flat	NP NHA
-1e	36137-P2	. . Cap - Solenoid	NP NHA
-1f	36192-P1	. . Collar - Plunger	NP NHA
-1g	36312-P1	. . Plunger - Solenoid	NP NHA
-2	25855	. Cover - Bottom	1
	Attaching Part		
-3	36164	. Screw - Machine (special)	1
	---***---		
-4	31297	. Cushion - Terminal	1
-5	36138	. Rollpin	NP NHA
-6	36136-P1	. Collar - Armature	NP NHA
-7	30473-P5	. Washer - Flat	NP NHA
	35473-P22	. Washer - Flat	NP NHA
-8	36138	. Rollpin	NP NHA
-9	36139-G1	. Base Assembly	NP NHA
-10	36143-G1	. Coil Assembly	NP NHA
-11	36135-P1	. Housing - Solenoid	NP NHA

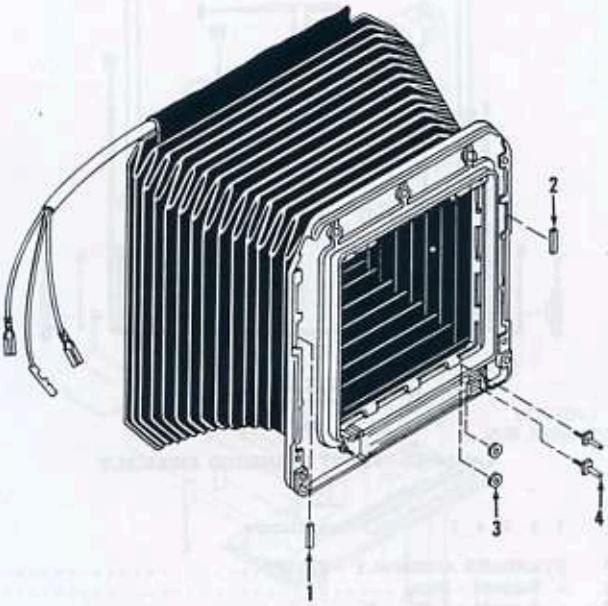

Figure 4B. BELLOWS COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
4B-	36125-G2		BELLOWS COMPLETE (over serial no. 646124)	Ref.
-1	36337-P1	.	Shim - Right	1
-2	36337-P2	.	Shim - Left	1
-3	200B1HR	.	Nut - Machine, #1 hex, brass, tin plate	2
-4	36121-P1	.	Contact - Solenoid	2
	No Number	.	Bellows and Base Assembly	NP NHA

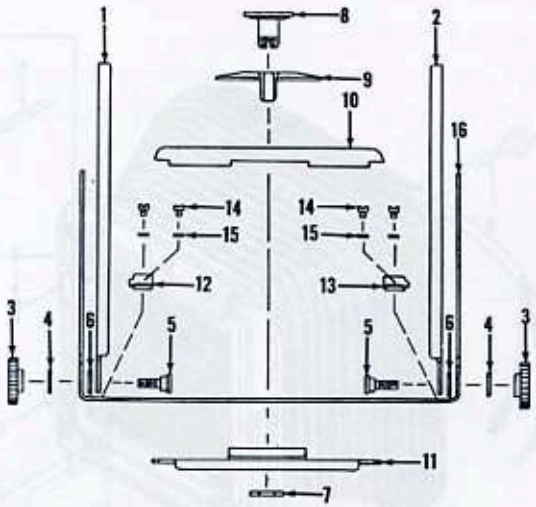

Figure 4C. FRONT STANDARD ASSEMBLY

Figure and Index No.	Part Number	1	2	3	4	5	Nomenclature	Qty.
4C-	36178-G1						STANDARD ASSEMBLY - FRONT	Ref.
-1	36100-P1						Support - Right	1
-2	36100-P2						Support - Left	1
	Attaching Parts							
-3	36105-P1						Knob - Locking	2
-4	30473-P6						Washer - Flat, 0.312 in. OD x 0.128 in. ID x 0.015 in. thk., fiber	2
-5	36104-P1						Screw - Machine (special)	2
-6	36214						Washer - Flat (special)	2
	---***---							
-7	36103						Nut - Machine (special)	1
-8	36102-P2						Screw - Machine (special) replaces 36102-P1	1
*	36102-P1						Screw - Machine (special)	Ref.
-9	36367-P1						Lever - Lock (replaces 36101-P1)	1
*	36101-P1						Lever - Lock	Ref.
-10	36366-P1						Plate - Lock, Upper (replaces 36109-G1)	1
*	36109-G1						Plate Assembly - Locking, Upper	Ref.
-11	36362-G1						Plate Complete - Locking, Lower (replaces 36106-G1)	1
*	36106-G1						Plate Assembly - Locking, Lower	Ref.
-12	36098-P1						Stop - Right	1
-13	36098-P2						Stop Left	1
	Attaching Parts							
-14	36099						Screw - Machine (special)	4
-15	30473-P20						Washer - Flat, 0.203 in. OD x 0.124 in. ID x 0.010 in. thk., stainless steel	4
	---***---							
-16	36097-P1						Standard - Front	1

* These items were used on early front standard assembly and are no longer available for replacement. Early front standard assemblies can be identified by the Upper Locking Plate Assembly (36109-G1) which included a leather insert. When making replacements on any of these items, it will be necessary to order each of the following: Machine Screw 36102-P2 - Lock Lever 36367-P1 - Upper Lock Plate 36366-P1 and Lower Locking Plate Complete 36362-G1.

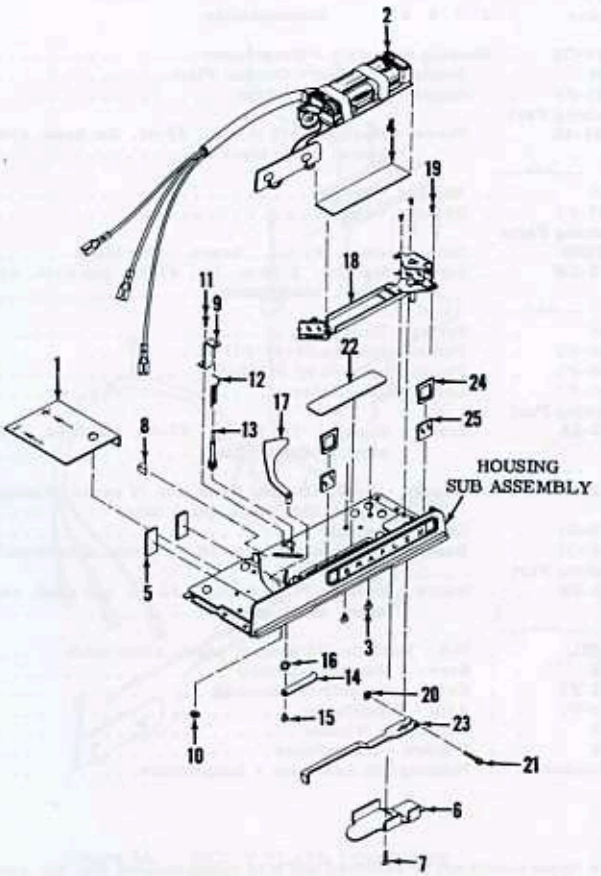

Figure 5. RANGEFINDER HOUSING COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
5 -	36145-G2		HOUSING COMPLETE - RANGEFINDER (over serial no. 646124)	Ref.	
	36229	.	Partition - Battery (replaced by 36349-P1)	Ref.	
-1	36349-P1	.	Guard (replaces p/n 36229 & 36217)	1	
	36217	.	Guard (flat type, replaced by 36349-P1)	Ref.	
-2	36207-G2	.	Plate Complete - Circuit (Figure 5A)	1	
	Attaching Part				
-3	131-3-3L	.	Screw - Thread Cutting, 3/16 in. lg., #3, Shakeproof Type 23, binding (pan) head, slotted, steel, black oxide	2	
	---***---				
-4	36145-P37	.	Insulator, 2-1/8 in. lg., 1/2 in. wide, 0.007 in. thk., varnished cambric cloth	1	LP

Figure and Index No.		Part Number	1	2	3	4	5	Nomenclature	Qty.
5	-	36145-G3	.					Housing Assembly - Rangefinder	1
-5		36346		.				Insulator - Battery Contact Plate	2
-6		36245-P1		.				Shield - Rangefinder Arm	1
		Attaching Part							
-7		100B3-4K		.				Screw - Machine, 1/4 in. lg., #3-48, flat head, slotted, brass, oxide black	1
		---***---							
-8		36010		.				Bumper - Sector	1
-9		36147-P1		.				Bracket - Pinion	1
		Attaching Parts							
-10		200B2HK		.				Nut - Machine, #2 hex., brass, oxide black	1
-11		116-2-3W		.				Screw - Machine, 3/16 in. lg., #2-56, pan head, slotted, steel, black oxide	1
		---***---							
-12		36149		.				Spring - Pinion	1
-13		36148-P2		.				Pinion (replaces 36148-P1)	1
		36148-P1		.				Pinion (replaced by 36148-P2)	Ref.
-14		36150-P1		.				Lever - Rangefinder	1
		Attaching Part							
-15		116-2-2A		.				Screw - Machine, 1/8 in. lg., #2-56, pan head, slotted, steel, cadmium plate	1
		---***---							
-16		221-2L		.				Washer - Lock, internal tooth, for #2 screw, Shakeproof Cat. #1202, steel, black oxide	1
-17		36155-G1		.				Sector Assembly	1
-18	*	36158-G2		.				Base Complete (see Figure 5B for procurable items)	1
		Attaching Part							
-19	*	116-2-3W		.				Screw - Machine, 3/16 in. lg., #2-56, pan head, slotted, steel, black oxide	3
		---***---							
-20	*	200-3SL		.				Nut - Machine, #3 square, steel, black oxide	1
-21	*	36152		.				Screw - Machine (special)	1
-22	*	36153-P1		.				Cover - Rangefinder Housing	1
-23	*	36169-P1		.				Arm - Rangefinder	1
-24		36205		.				Retainer - Window	2
-25		36154		.				Window - Rangefinder	2
		No Number		.				Housing Sub Assembly - Rangefinder	Ref.

* These items should not be removed and it is recommended that the rangefinder housing assembly be returned for exchange. See note below.

NOTE: To insure trouble free operation, remove indexes 1, 2, 3, & 4 and return rangefinder housing assembly to the nearest Graflex Service Department. An alternate rangefinder housing assembly (at nominal charge), with critical mirror and lever adjustments accomplished, will be returned. A focusing scale indicator (Figure 2-7) and guard (Figure 5-1) will also be furnished for installation. Use Cat. #9472 in correspondence when using the exchange program for rangefinder housing assemblies.

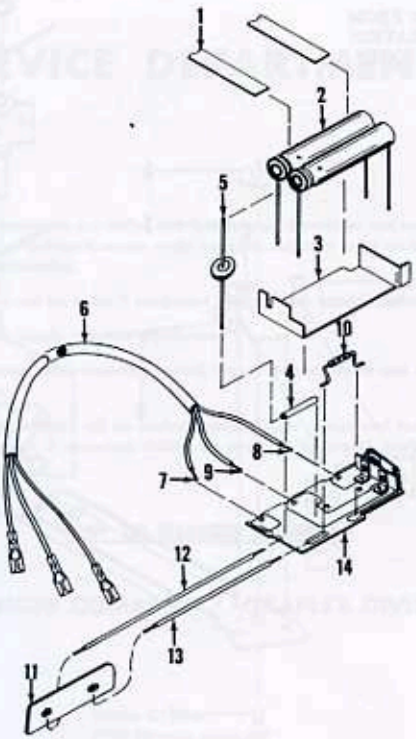

Figure 5A. CIRCUIT PLATE COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
5A-	36207-G2		PLATE COMPLETE - CIRCUIT (over serial no. 646124)	Ref.	
-1		.	Tape (5/16 in. wide) black Mylar, 3M Scotch Brand Cat. #850	AR	LP
-2	36167-P1	.	Capacitor	2	
-3	36203	.	Insulator	1	
-4	37238-P9	.	Tubing (3/4 in. lg.) #20, black extruded vinyl	1	LP
-5	38293-P4	.	Diode, JEDEC No. IN2483	1	
-6	37238-P7	.	Tubing (4-1/2 in. lg.) #10, black extruded vinyl	1	LP
-7	36325-G3	.	Wire Assembly (yellow)	1	
-8	36325-G5	.	Wire Assembly (black)	1	
-9	36325-G6	.	Wire Assembly (white)	1	
-10	402-27-2-2	.	Resistor, 1/2 w., 2700 ohms	1	
-11	36208-G1	.	Plate Assembly - Battery Contact	1	
-12	36207-P6	.	Wire (4-1/2 in. lg.) No. 24 AWG, black insulation	1	LP
-13	36207-P7	.	Wire (3-1/4 in. lg.) No. 24 AWG, black insulation	1	LP
-14	36162-G2	.	Plate Assembly - Circuit (includes switch)	1	

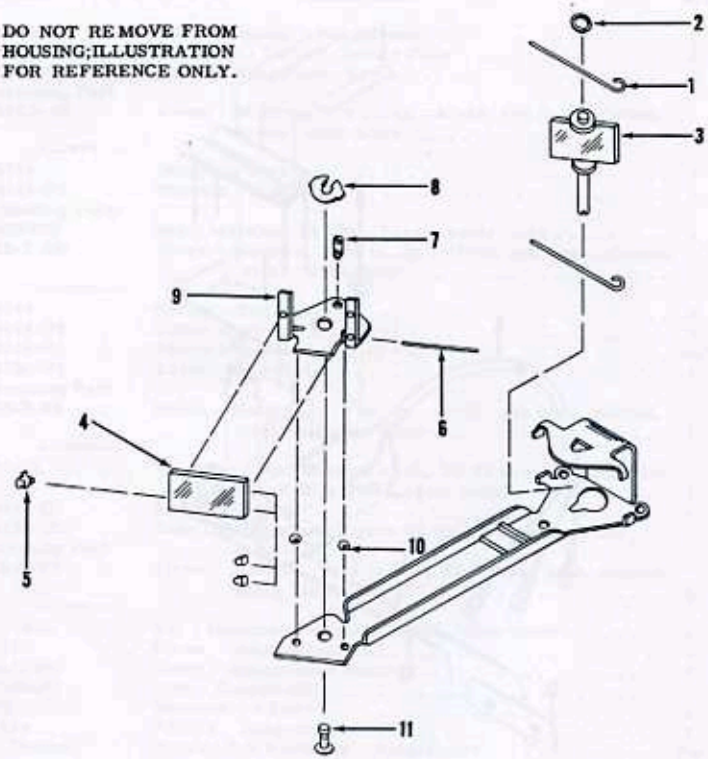

Figure 5B. BASE COMPLETE

Figure and Index No.		Part Number	1 2 3 4 5 Nomenclature	Qty.	
5B-		36158-G2	BASE COMPLETE	Ref.	
-1		36160	. Spring - Mirror Shaft	2	
-2	*	35473-P9	. Washer - Flat	Ref.	
-3	*	36013-G1	. Mirror & Shaft Assembly.	Ref.	
-4		34711	. Mirror - Transparent	Ref.	
		Attaching Part			
-5		32416-P1	. Retainer - Mirror.	3	
		---***---			
-6		36235	. Wire - Mount, 3/4 in. lg. x 0.062 in. dia., steel	1	LP
-7		34709	. Screw - Machine (special)	1	
-8		256-1L	. Ring - Retaining, Waldes Kohinoor, Inc. p/n 5139-12, steel, black oxide	1	
-9		34710-P1	. Mount - Transparent Mirror	1	
-10		300-3	. Ball - Steel (0.0625 in. dia.)	2	
-11	*	34708	. Stud - Transparent Mirror Mount	Ref.	
		No Number	. Base Sub Assembly.	Ref.	

* These items should not be removed and it is recommended that the rangefinder housing assembly be returned for exchange. See note on page 42.

SERVICE DEPARTMENTS

These Departments are staffed with factory-trained workmen and equipped with proper facilities to service under warranty, adjust or repair all Graflex-made merchandise.

Much time will be saved if equipment is shipped by **Special Delivery.**

Be sure to supply complete instructions.

If unit comes within warranty period, supply **owner's name** and **date of purchase.**

Quotation estimate will be mailed promptly upon receipt and inspection of equipment, if requested. Return this promptly for speedy servicing of unit.

SHIP TO NEAREST ADDRESS

THE SINGER COMPANY / GRAFLEX DIVISION

Home Office:
3750 Monroe Avenue
Rochester, New York 14603

Eastern Region:
1406 Bergen Blvd.
Ft. Lee, New Jersey 07024

Graflex of Canada Limited:
47 Simcoe Street
Toronto 1, Ontario, Canada

Western Region:
800 North Cole Avenue
Hollywood, California 90038

Midwest Region:
5515 Milton Parkway
Rosemont, Illinois 60018

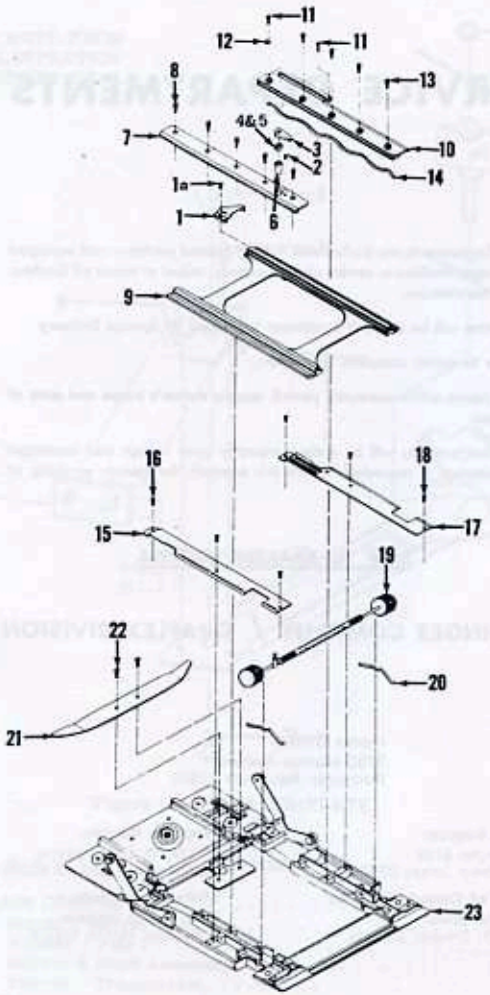

Figure 6. BED COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
6-	36035-G1	BED COMPLETE (Super Graphic)	Ref.
	36035-G3	BED COMPLETE (Super Speed Graphic)	Ref.
-1	36369-G1	. Bracket Assembly - Rangefinder Actuating (replaces 36059-P1, 34932 & 32432)	1
-1a	36370	. . Screw - Machine (special)	1
	36059-P1	. Bracket - Rangefinder Actuating (replace with 36369-G1)	Ref.
	Attaching Parts		
	34932	. Screw - Machine (special) available for replacement	2
	---***---		
	32432	. Plate - Actuating Bracket (replace with 36369-G1)	Ref.

Figure and Index No.	Part Number	1	2	3	4	5	Nomenclature	Qty.	
6-2	31246-P4	.					Screw - Machine (special)	1	
-3	36042-P1	.					Lever - Yoke Lock	1	
-4	30473-P11K	.					Washer - Flat, 0.281 in. OD x 0.177 in. ID x 0.010 in. thk., brass, oxide black	AR	
-5	33500-P72K	.					Washer - Flat, 0.281 in. OD x 0.177 in. ID x 0.005 in. thk., brass, oxide black	AR	
-6	36041	.					Sleeve - Yoke Lock	1	
-7	36036-P1	.					Guide - Yoke, Right	1	
	Attaching Part								
-8	116-2-6C	.					Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	5	
	---***---								
-9	36058-P1	.					Yoke - Bed	1	
-10	36037-P1	.					Guide - Yoke, Left	1	
	Attaching Parts								
-11	116-2-6C	.					Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	2	
-12	221-2L	.					Washer - Lock, internal tooth, for #2 screw, Shakeproof Cat. #1202, steel, black oxide	1	
-13	36189-P2	.					Screw - Machine (special)	4	
	---***---								
-14	36044-P1	.					Spring - Yoke	2	
-15	36046-P1	.					Cover - Bed, Right	1	
	Attaching Part								
-16	116-2-4C	.					Screw - Machine, 1/4 in. lg., #2-56, pan head, slotted, steel, chrome plate	3	
	---***---								
-17	36046-P2	.					Cover - Bed, Left	1	
	Attaching Part								
-18	116-2-4C	.					Screw - Machine, 1/4 in. lg., #2-56, pan head, slotted, steel, chrome plate	3	
	---***---								
-19	36035-G2	.					Pinion Assembly - Focusing	1	
	34111-P7	.	.				Insert - Leather	2	
	36039	.	.				Knob - Focusing	NP	NHA
	36040	.	.				Post - Yoke Lock	NP	NHA
	36038-P1	.	.				Pinion - Focusing	NP	NHA
-20	36259-P1	.					Spring - Focusing Pinion	2	
-21	36047-P1	.					Spring - Bed Brace	1	
	Attaching Part								
-22	106-5-3L	.					Screw - Machine, 3/16 in. lg., #5-40, oval, fillister head, slotted, steel, black oxide	2	
	---***---								
-23	36049-G1	.					Bed Assembly (Super Graphic)	1	
	36049-G4	.					Bed Assembly (Super Speed Graphic)	1	
	36049-G2	.	.				Hinge Assembly	1	
	36054	.	.	.			Socket - Tripod	NP	NHA
	36051-P1	.	.				Hinge - Bed	NP	NHA
	30172-P43K	.	.				Pin - Hinge, 1.343 in. lg., 0.0808 in. dia., phosphor bronze, oxide black	2	
	36052-P1	.	.				Spring - Right	1	
	36052-P2	.	.				Spring - Left	1	
	36049-G3	.	.				Bed Sub Assembly (Super Graphic)	1	
	36049-G5	.	.				Bed Sub Assembly (Super Speed Graphic)	1	
	36356-G1	.	.	.			Cap Assembly - Bed (Super Graphic)	1	
	36212-P3	.	.	.	.		Plate - Name (Super Graphic)	1	
	36356-G2	.	.	.			Cap Assembly - Bed (Super Speed Graphic)	1	
	36212-P4	.	.	.	.		Plate - Name (Super Speed Graphic)	1	
	36048-P1	.	.	.			Covering - Bed	1	
	36053	.	.	.			Rivet - Bed Brace	2	
	36055-G1	.	.	.			Brace Assembly - Right	1	
	36055-G2	.	.	.			Brace Assembly - Left	1	
	36050-P1	.	.	.			Bed	NP	NHA

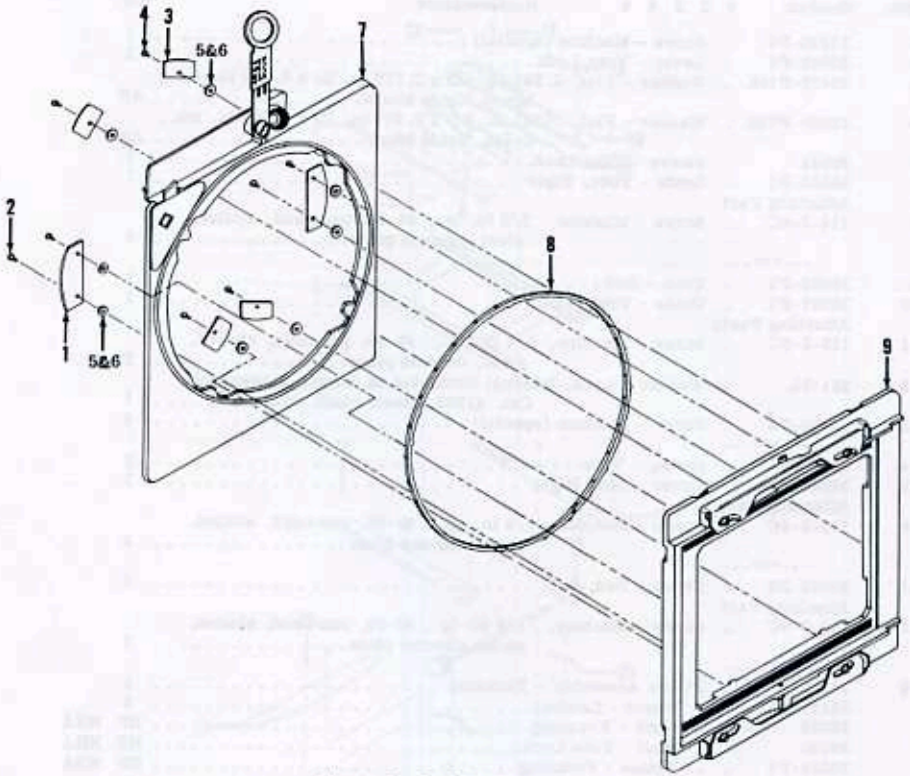

Figure 7. BACK ASSEMBLY

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
7-	36060-G1		BACK ASSEMBLY	Ref.
-1	36062-P1	.	Retainer - Back (large)	2
	Attaching Part			
-2	116-2-2A	.	Screw - Machine, 1/8 in. lg., #2-56, pan head, cadmium plate	4
	---***---			
-3	36063-P1	.	Retainer - Back (small)	4
	Attaching Part			
-4	116-2-2A	.	Screw - Machine, (same as index 2)	4
	---***---			
-5	30473-P28K	.	Washer - Flat, 0.250 in. OD x 0.099 in. ID x 0.012 in. thk., brass, oxide black	AR
-6	30473-P42K	.	Washer - Flat, 0.250 in. OD x 0.099 in. ID x 0.016 in. thk., brass, oxide black	AR (no longer used)
-7	36068-G2	.	Frame Complete - Back, Stationary, (Figure 7A) replaces 36068-G2X	1
	36068-G2X	.	Frame Complete - Back, Stationary, (Figure 7B) replaced by 36068-G2	Ref.
-8	36061	.	Ring - Revolving	1
-9	36060-G2	.	Frame Complete - Revolving, (Figure 7C)	1

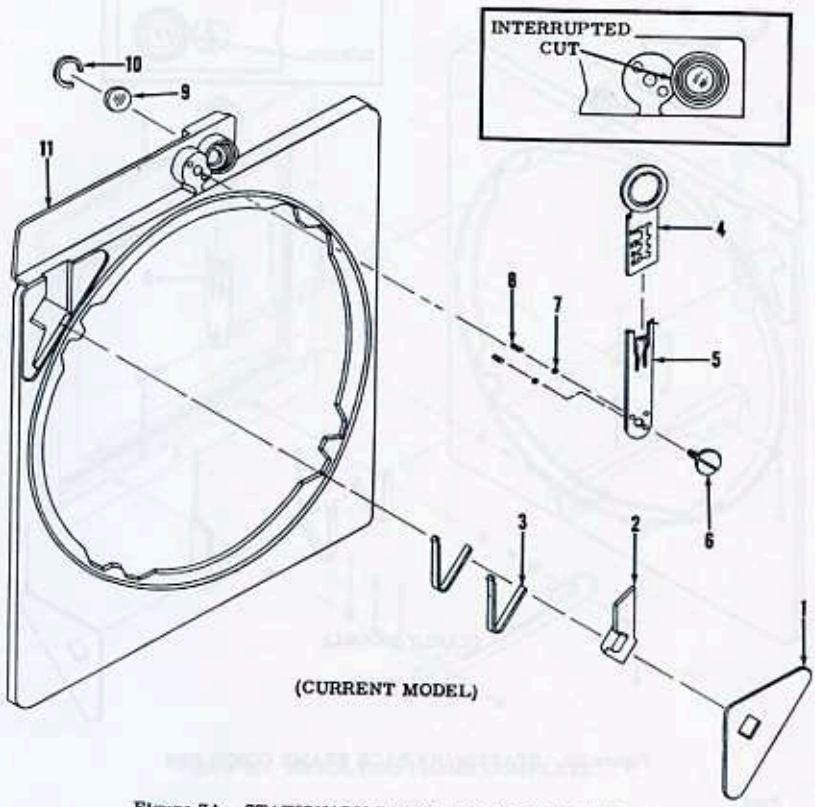

Figure 7A. STATIONARY BACK FRAME COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
7A-	36068-G2		FRAME COMPLETE - BACK, STATIONARY	Ref.
-1	36072-P1	.	Cover - Release Button	1
-2	36070-P1	.	Button - Release	1
-3	36071-P1	.	Spring - Button	2
-4	36172-G1	.	Peepsight Assembly	1
-5	36247-P1	.	Carrier - Peepsight	1
	Attaching Part			
-6	36249	.	Screw - Machine (special)	1
	---***---			
-7	300-4	.	Ball - Steel, 0.9375 in. dia.	2
-8	38258	.	Spring - Carrier	2
-9	34770	.	Window - Rear	1
	Attaching Part			
-10	30442-P11	.	Ring - Retaining	1
	---***---			
-11	36068-G1	.	Frame Assembly - Stationary	1

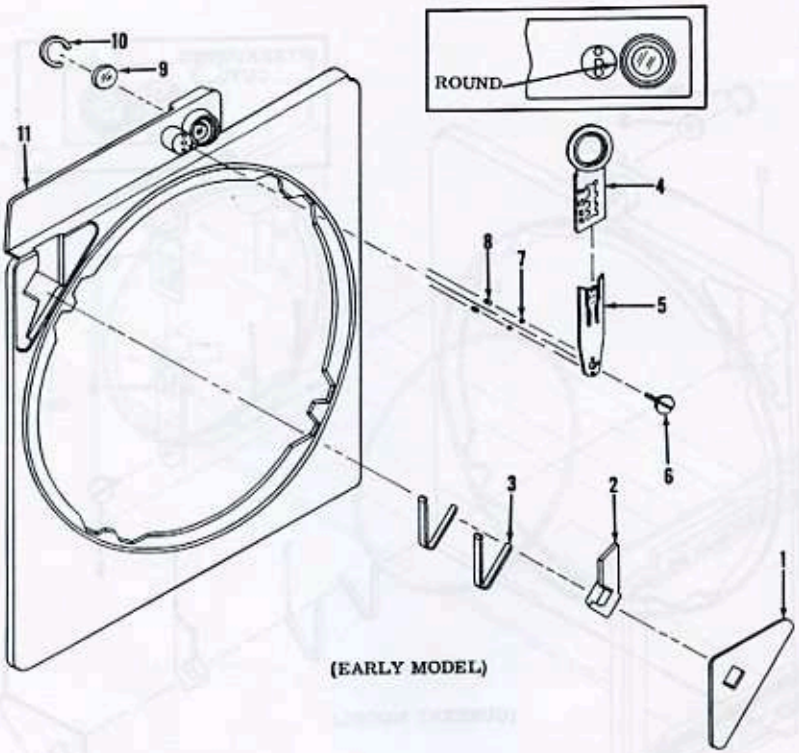

Figure 7B. STATIONARY BACK FRAME COMPLETE

Figure and Index No.		Part Number	1	2	3	4	5	Nomenclature	Qty.
7B-		36068-G2X						FRAME COMPLETE - BACK, STATIONARY (replace with 36068-G2)	Ref.
-1		36072-P1					.	Cover - Release Button	1
-2		36070-P1					.	Button - Release	1
-3		36071-P1					.	Spring - Button	2
-4		36172-G1					.	Peepsight Assembly	1
-5	*	36171-P1					.	Carrier - Peepsight	1
		Attaching Part							
-6	*	36200					.	Screw - Machine (special)	1
		---***---							
-7	*	300-3					.	Ball - Steel, 0.0625 in. dia.	2
-8	*	22193					.	Spring - Carrier	2
-9		34770					.	Window - Rear	1
		Attaching Part							
-10		30442-P11					.	Ring - Retaining	1
		---***---							
-11		36068-G1X					.	Frame Assembly - Stationary	Ref.

* These items are not interchangeable with current stationary frame assembly 36068-G1.

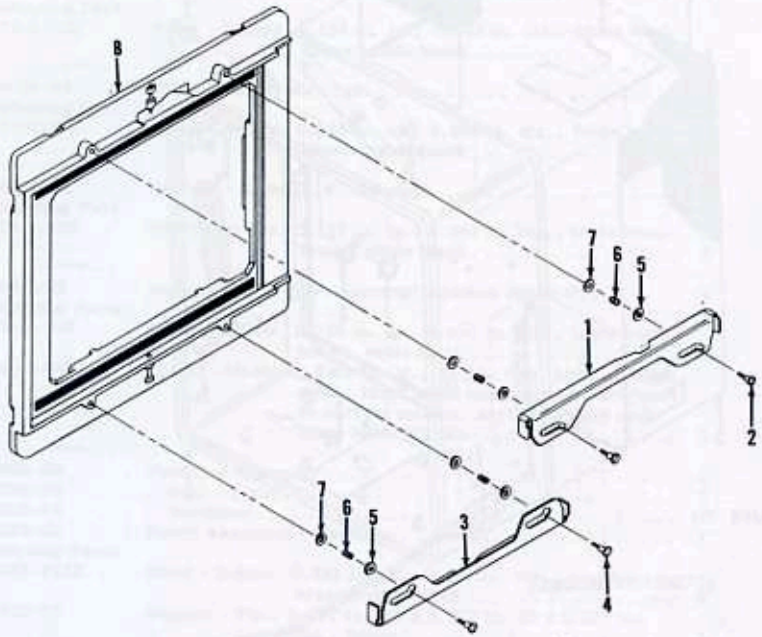

Figure 7C. REVOLVING FRAME COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
7C-	36060-G2		FRAME COMPLETE - REVOLVING	Ref.
-1	36066-P1	.	Lock - Slide, Upper	1
	Attaching Part			
-2	36067-P1	.	Screw - Machine (special)	2
	---***---			
-3	36066-P2	.	Lock - Slide, Lower	1
	Attaching Part			
-4	36067-P1	.	Screw - Machine (special)	2
	---***---			
-5	30473-P72H	.	Washer - Flat, 0.250 in. OD x 0.128 in. ID x 0.005 in. thk., brass, nickel plate	4
-6	36065	.	Spring - Slide Lock	4
-7	30473-P28K	.	Washer - Flat, 0.250 in. OD x 0.099 in. ID x 0.012 in. thk., brass, oxide black	4
-8	36350-G1	.	Frame Assembly	1
	31722-P3	. .	Strip - Light Seal	2

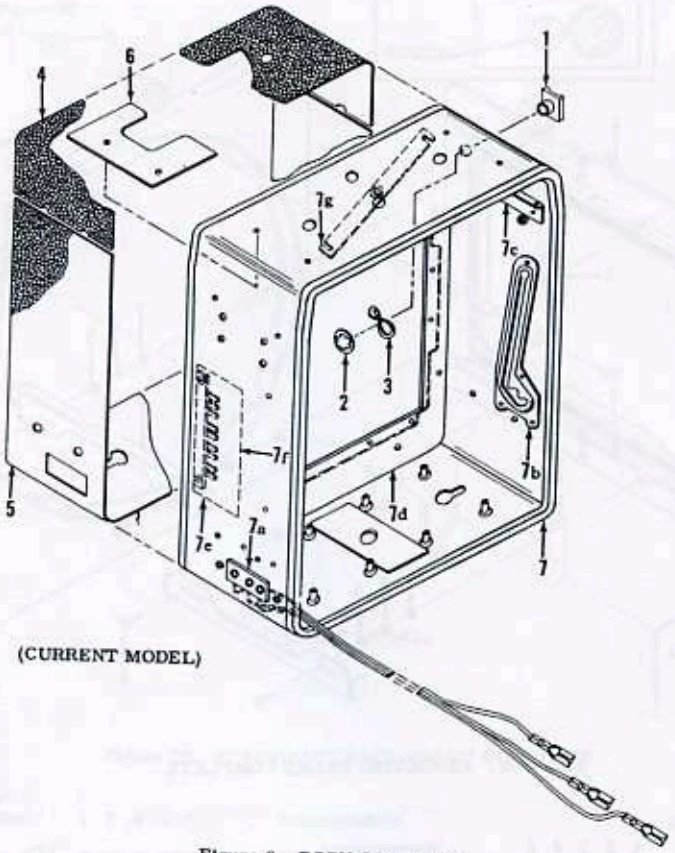

Figure 8. BODY COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
8-	36020-G2		BODY COMPLETE (over serial no. 646124)	Ref.
-1	36024-P1	.	Guard - Shutter Release Button	1
	Attaching Parts			
-2	254-3A	.	Ring - Retaining, Waldes-Kohinoor, Inc. p/n 5105-31, steel, cadmium plate	1
-3	224-4A	.	Washer - Spring, Shakeproof p/n 3502-20-22, steel, cadmium plate	1
	---***---			
-4	36022-P1	.	Covering - Upper	1
-5	36022-P2	.	Covering - Lower	1
-6	36204	.	Insulator - Battery	1
-7	36025-G2	.	Body Assembly	1
-7a	36233-G2	.	. Receptacle Assembly	1
	Attaching Part			
	175-6-8K	.	. Rivet - Hollow, 0.125 in. lg., 0.120 in. dia., oval head, brass, oxide black	2
	---***---			

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
	36028-P1	. .	Plate - Bed Brace, Right	1	
	Attaching Part				
	176-3-10K	. .	Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	4	
	---***---				
8-7b	36028-P2	. .	Plate - Bed Brace, Left	1	
	Attaching Part				
	176-3-10K	. .	Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	4	
	---***---				
	36029-P1	. .	Support - Right (R. F. Housing)	1	
	Attaching Part				
	176-3-10K	. .	Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	2	
	---***---				
-7c	36029-P2	. .	Support - Left (R. F. Housing) replaces 36029-P1	1	
	Attaching Parts				
	176-3-10K	. .	Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head brass, oxide black	1	
	116-2-3W	. .	Screw - Machine, 3/16 in. lg., #2-56, Pan head, slotted, steel, black oxide and clear lacquer (used on current models, earlier models used Rivet 30363-P27K)	1	
	---***---				
-7d	36032-G2	. .	Partition Assembly	1	
	36034-P1	. . .	Seal - Light	1	
	36033-P2	. . .	Partition	NP	NHA
-7e	36322-G1	. .	Board Assembly - Terminal	1	
	Attaching Parts				
	30363-P23K	. .	Rivet - Hollow, 0.281 in. lg., 0.062 in. dia., round head, brass, oxide black	2	
	33500-P6	. .	Washer - Flat, 0.187 in. OD x 0.071 in. ID x 0.016 in. thk., brass	2	
	35473-P24	. .	Washer - Flat, 0.187 in. OD x 0.070 in. ID x 0.032 in. thk., phenolic	4	
	---***---				
-7f	36324	. .	Insulator	1	
-7g	36030-P1	. .	Lock - Focusing Scale	1	
	Attaching Part				
	36031	. .	Stud - Focusing Scale Lock	1	
	---***---				
	248-6-2	. .	Fastener - Pem (press fit)	NP	NHA
	30915-P2	. .	Bushing - Bed Hinge (press fit)	NP	NHA
	36026-P1	. .	Body - Camera	NP	NHA

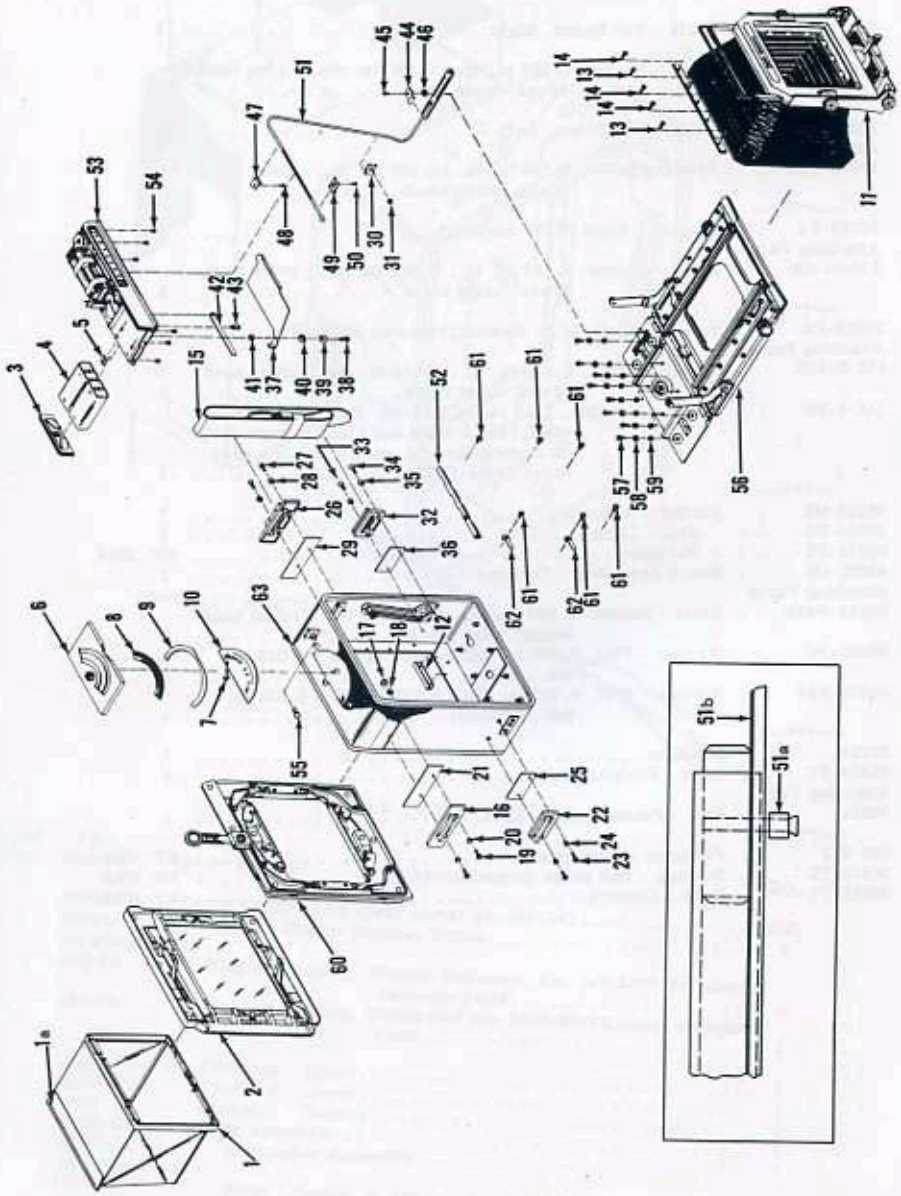

Figure 9. CAMERA BASIC (up to serial No. 646124)

Figure and Index No.	Part Number	1 1 2 3 4 5	Nomenclature	Qty.	
9-	36000-G1		CAMERA BASIC - SUPER GRAPHIC (up to serial no. 646124)	Ref.	
-1	36082-G1	.	Hood Assembly	1	
-1a	36087-P1	. .	Clip - Dark Slide	1	
-2	36073-G1	.	Frame Assembly - Focusing (Figure 3)	1	
-3	36198-G1	.	Cover Assembly - Battery Compartment	1	
-4	33111	. .	Battery, 22-1/2v., flat type, Eveready Cat. #412 or equal	2	LP
-5	36328-P1	.	Clip - Retainer	1	
-6	36176-G1	.	Cover Assembly - Focusing Scale	1	
-7	36002	.	Indicator - Focusing Scale	1	
-8	36001-P1	.	Guide - Exposure	1	
-9	36197-P1	.	Spring - Exposure Guide	1	
-10	36213-P1	.	Plate - Focusing Scale	1	
-11	36096-G1	.	Standard Complete - Front (Figure 10)	1	
	Attaching Parts				
-12	32459	.	Clip - Bellows	6	
-13	110-6-5W	.	Screw - Machine, 5/16 in. lg., #6-32, straight side binding head, slotted, steel, black oxide & lacq.	2	
-14	31089-P8	.	Screw - Machine (special)	3	
	---***---				
-15	36006-P1	.	Handle	1	
-16	36021-P1	.	Bracket - Handle, Upper (right side)	1	
	Attaching Parts				
-17	200-4HL	.	Nut - Machine, #4 hex., steel, black oxide.	2	
-18	221-4L	.	Washer - Lock, internal tooth, for #4 screw, Shakeproof Cat. #1204, steel, black oxide	2	
-19	100-4R6E	.	Screw - Machine, 3/8 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate	2	
-20	36231	.	Washer - Insulating, Parker-Kalon, #106, nylon	1	
	---***---				
-21	36227-P1	.	Insulator - Handle Bracket.	1	
-22	36021-P2	.	Bracket - Handle, Lower (right side).	1	
	Attaching Parts				
-23	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome Plate	2	
-24	36231	.	Washer - Insulating, Parker-Kalon, #106, nylon	2	
	---***---				
-25	36227-P2	.	Insulator - Handle Bracket.	1	
-26	36021-P1	.	Bracket - Handle, Upper (left side)	1	
	Attaching Parts				
-27	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate	2	
-28	36231	.	Washer - Insulating, Parker - Kalon, #106, nylon	2	
	---***---				
-29	36227-P1	.	Insulator - Handle Bracket.	1	
-30	36193-P2	.	Clamp	1	
	Attaching Part				
-31	200-4HL	.	Nut - Machine, #4 hex., steel, black oxide.	1	
	---***---				
-32	36021-P2	.	Bracket - Handle, Lower (left side).	1	
	Attaching Parts				
-33	100-4R6E	.	Screw - Machine, 3/8 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate	1	
-34	100-4R5E	.	Screw - Machine, 5/16 in. lg., #4-40, flat head, Phillips Drive, steel, chrome plate	1	
-35	36231	.	Washer - Insulating, Parker-Kalon, #106, nylon	2	
	---***---				
-36	36227-P2	.	Insulator - Handle Bracket.	1	
-37	36092-P1	.	Cover - Cam	1	
	Attaching Parts				
-38	110-2-5W	.	Screw - Machine, 5/16 in. lg., #2-56, straight side binding head, slotted, steel, black oxide & lacq.	1	
-39	36244	.	Collar - Cam Cover	1	
-40	30540-P2	.	Washer - Spring.	1	
	---***---				

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.	
9-41	30473-P25L	.	Washer - Flat, 0.281 in. OD x 0.093 in. ID x 0.012 in. thk., steel, black oxide	1	
-42	36130	.	Spring - Cam Cover	1	
-43	36128	.	Stud - Cam Cover	1	
-44	36193-P1	.	Clamp	1	
	Attaching Parts				
-45	102B3-4K	.	Screw - Machine, 1/4 in. lg., #3-48, round head, slotted, brass, oxide black	1	
-46	33500-P36	.	Washer - Flat, 0.312 in. OD x 0.128 in. ID x 0.062 in. thk., phenolic	1	
	---***---				
-47	34723-P2	.	Clamp	1	
	Attaching Part				
-48	102-3-2W	.	Screw - Machine, 1/8 in. lg., #3-48, round head, slotted, steel, black oxide & lacq	1	
	---***---				
-49	36193-P2	.	Clamp	1	
	Attaching Part				
-50	102-3-2W	.	Screw - Machine, 1/8 in. lg., #3-48, round head, slotted, steel, black oxide & lacq	1	
	---***---				
-51	34739-G2	.	Tube Assembly - Rangefinder	1	
-51a	36009	.	. Collar - Pin	1	
-51b	36195	.	. Slide - Rangefinder Actuating	1	
-52	36246-P1	.	Insulator - Junction	1	
-53	36145-G1	.	Housing Complete - Rangefinder (Figure 11)	1	
	Attaching Part				
-54	102-2-2W	.	Screw - Machine, 1/8 in. lg., #2-56, round head, slotted, steel, black oxide & lacq	6	
	---***---				
-55	36023-P1	.	Button - Shutter Release (0.547 in. lg.)	1	
	36023-P2	.	Button - Shutter Release (0.501 in. lg.)	1	
	36023-P3	.	Button - Shutter Release (0.591 in. lg.)	1	
-56	36035-G1	.	Bed - Complete (Figure 6)	1	
	Attaching Parts				
-57	116-2-4C	.	Screw - Machine, 1/4 in. lg., #2-56, pan head, slotted, steel, chrome plate	8	
-58	221-2L	.	Washer - Lock, internal tooth, for #2 Screw, Shakeproof Cat. #1202, steel, black oxide	8	(no longer used)
-59	30473-P44K	.	Washer - Flat, 0.250 in. OD x 0.099 in. ID x 0.025 in. thk., brass, oxide black	8	
	---***---				
-60	36060-G1	.	Back Assembly (Figure 7)	1	
	Attaching Parts				
-61	110-6-3W	.	Screw - Machine, 3/16 in. lg., #6-32, straight side binding head, slotted, steel, black oxide & lacq	6	
-62	36219	.	Clip - Wire	2	
	---***---				
-63	36020-G1	.	Body - Complete (Figure 12)	1	

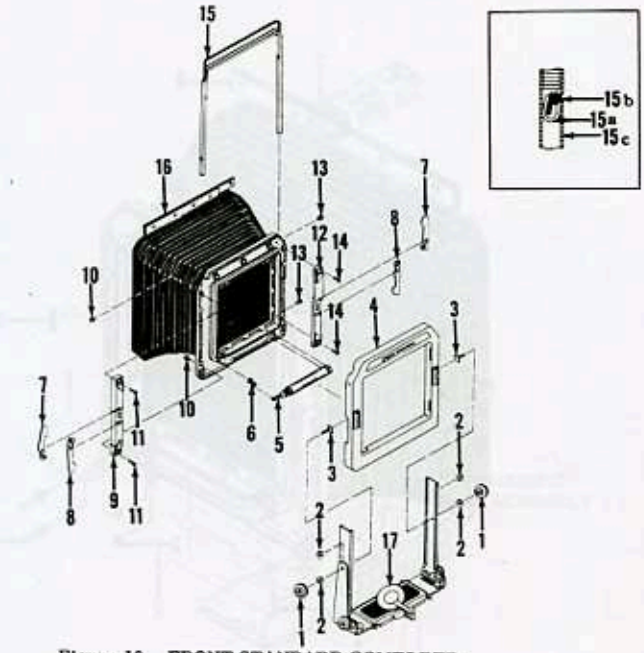

Figure 10. FRONT STANDARD COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
10-	36096-G1	STANDARD COMPLETE - FRONT (up to serial no. 646124) . . .	Ref.
-1	36105-P1	. Knob - Locking	2
-2	30473-P6	. Washer - Flat, 0.312 in. OD x 0.128 in. ID x 0.015 in. thk., fiber	4
-3	36127	. Stud - Front Frame Locking	2
-4	36117-G1	. Frame Assembly - Front	1
	36212-P1	. . Plate - Name	1
-5	36133-G1	. Solenoid Assembly (Figure 4A)	1
-6	36123-P1	. Crank - Shutter Trip	1
-7	36124-P1	. Lock - Upper	2
-8	36124-P2	. Lock - Lower	2
-9	36113-G1	. Stile Assembly - Right	1
	Attaching Parts		
-10	36043	. Nut - Machine (special)	2
-11	116-2-6C	. Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	2
	---***---		
-12	36113-G2	. Stile Assembly - Left	1
	Attaching Parts		
-13	36043	. Nut - Machine (special)	2
-14	116-2-6C	. Screw - Machine, 3/8 in. lg., #2-56, pan head, slotted, steel, chrome plate	2
	---***---		
-15	34848-G3	. Finder Complete	1
-15a	34785-G1	. . Finder Assembly	1
-15b	34787	. . Stop - Finder	2
-15c	34795	. . Frame - Finder	1
-16	36125-G1	. Bellows Complete (Figure 10A)	1
-17	36178-G1	. Standard Assembly - Front (Figure 4C)	1

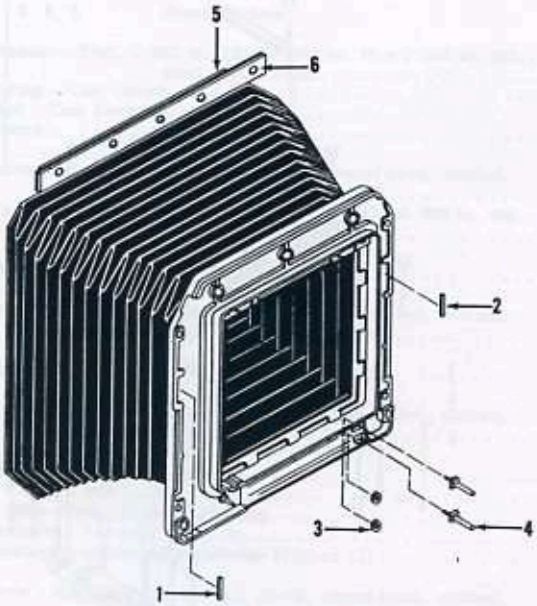

Figure 10A. BELLOWS COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
10A-	36125-G1	BELLOWS COMPLETE (up to serial no. 646124)	Ref.
-1	36337-P1	. Shim - Right	1
-2	36337-P2	. Shim - Left	1
-3	200B1HR	. Nut - Machine, #1 hex., brass, tin plate	2
-4	36121-P1	. Contact - Solenoid.	2
	No Number	. Insulator and Spring Sub Assembly (cemented).	Ref.
-5	36211-P2	. . Insulator	1
-6	36230-P1	. . Spring	1
	No Number	. Bellows and Base Assembly	NP NHA

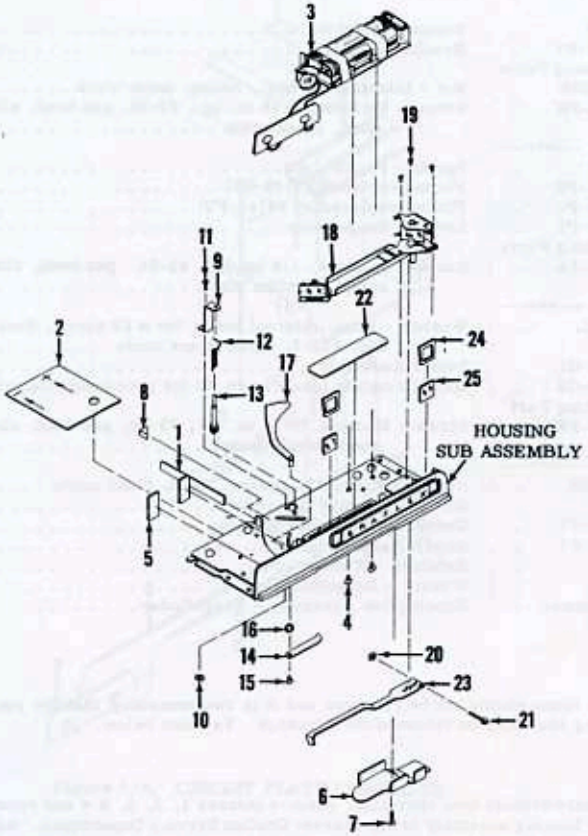

Figure 11. RANGEFINDER HOUSING COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.
11 -	36145-G1	HOUSING COMPLETE - RANGEFINDER (up to serial no. 64124)	Ref.
-1	36229	. Partition - Battery (replaced by 36349-P1)	Ref.
-2	36217	. Guard (flat type, replaced by 36349-P1)	Ref.
	36349-P1	. Guard (replaces p/n 36229 & 3617)	1
-3	36207-G1	. Plate Complete - Circuit (Figure 11A)	1
	Attaching Part		
-4	131-3-3L	. Screw - Thread Cutting, 3/16 in. lg., #3, Shakeproof Type 23, binding (pan) head, slotted, steel, black oxide	2
		---***---	
	36145-G3	. Housing Assembly. - Rangefinder	1
-5	36346	. . Insulator - Battery Contact Plate	2
-6	36245-P1	. . Shield - Rangefinder Arm	1
	Attaching Part		
-7	100B3-4K	. . Screw - Machine, 1/4 in. lg., #3-48, flat head, slotted, brass, oxide black	1
		---***---	

Figure and Index No.		Part Number	1 2 3 4 5	Nomenclature	Qty.
11-8		36010	. .	Bumper - Sector	1
-9		36147-P1	. .	Bracket - Pinion	1
		Attaching Parts			
-10		200B2HK	. .	Nut - Machine, #2 hex., brass, oxide black	1
-11		**116-2-3W**	. .	Screw - Machine, 3/16 in. lg., #2-56, pan head, slotted, steel, black oxide	1
		---***---			
-12		36149	. .	Spring - Pinion	1
-13		36148-P2	. .	Pinion (replaces 36148-P1)	1
		36148-P1	. .	Pinion (replaced by 36148-P2)	Ref.
-14		36150-P1	. .	Lever - Rangefinder	1
		Attaching Parts			
-15		**116-2-2A**	. .	Screw - Machine, 1/8 in. lg., #2-56, pan head, slotted, steel, cadmium plate	1
		---***---			
-16		221-2L	. .	Washer - Lock, internal tooth, for a #2 screw, Shakeproof Cat. #1202, steel, black oxide	1
-17		36155-G1	. .	Sector Assembly	1
-18	*	36158-G2	. .	Base Complete (see Figure 5B for procurable items)	1
		Attaching Part			
-19	*	**116-2-3W**	. .	Screw - Machine, 3/16 in. lg., #2-56, pan head, slotted, steel, black oxide	3
		---***---			
-20	*	200-3SK	. .	Nut - Machine, #3, square, steel, black oxide	1
-21	*	36152	. .	Screw - Machine (special)	1
-22	*	36153-P1	. .	Cover - Rangefinder Housing	1
-23	*	36169-P1	. .	Arm - Rangefinder	1
-24		36205	. .	Retainer - Window	2
-25		36154	. .	Window - Rangefinder	2
		No Number	. .	Housing Sub Assembly - Rangefinder	Ref.

* These items should not be removed and it is recommended that the rangefinder housing assembly be returned for exchange. See note below.

NOTE: To insure trouble free operation, remove indexes 1, 2, 3, & 4 and return rangefinder housing assembly to the nearest Graflex Service Department. An alternate rangefinder housing assembly (at nominal charge), with critical mirror and lever adjustments accomplished, will be returned. A focusing scale indicator (Figure 9-7) and guard (Figure 11-2) will also be furnished for installation. Use Cat. #9472 in correspondence when using the exchange program for rangefinder housing assembly.

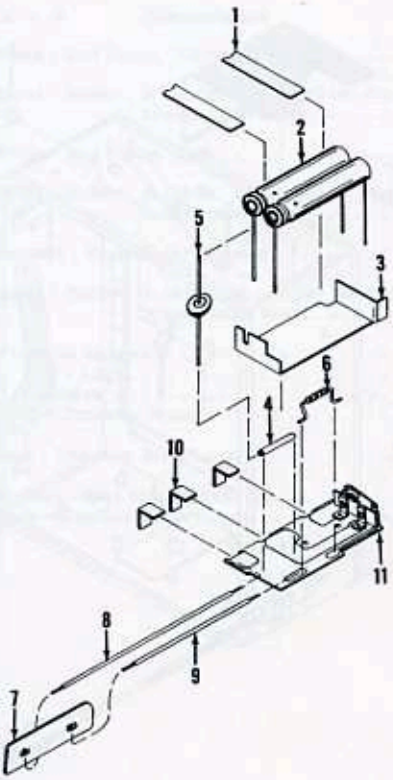

Figure 11A. CIRCUIT PLATE COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5 Nomenclature	Qty.	
11A-	36207-G1	PLATE COMPLETE - CIRCUIT (up to serial no. 646124).	Ref.	
-1		. Tape (5/16 in. wide) black Mylar, 3M Scotch Brand Cat. #850	AR	LP
-2	36167-P1	. Capacitor	2	
-3	36203	. Insulator.	1	
-4	37238-P9	. Tubing (3/4 in. lg.) #20, black extruded vinyl	1	LP
-5	38293P4	. Diode, JEDEC # IN2483.	1	
-6	402-27-2-2	. Resistor, 1/2 w., 2700 ohms	1	
-7	36208-G1	. Plate Assembly - Battery Contact	1	
-8	36207-P6	. Wire (4-1/2 in. lg.) No. 24 AWG, black insulation.	1	LP
-9	36207-P7	. Wire (3-1/4 in. lg.) No. 24 AWG, black insulation.	1	LP
-10	36166	. Terminal	3	
-11	36162-G1	. Plate Assembly - Circuit (includes switch)	1	

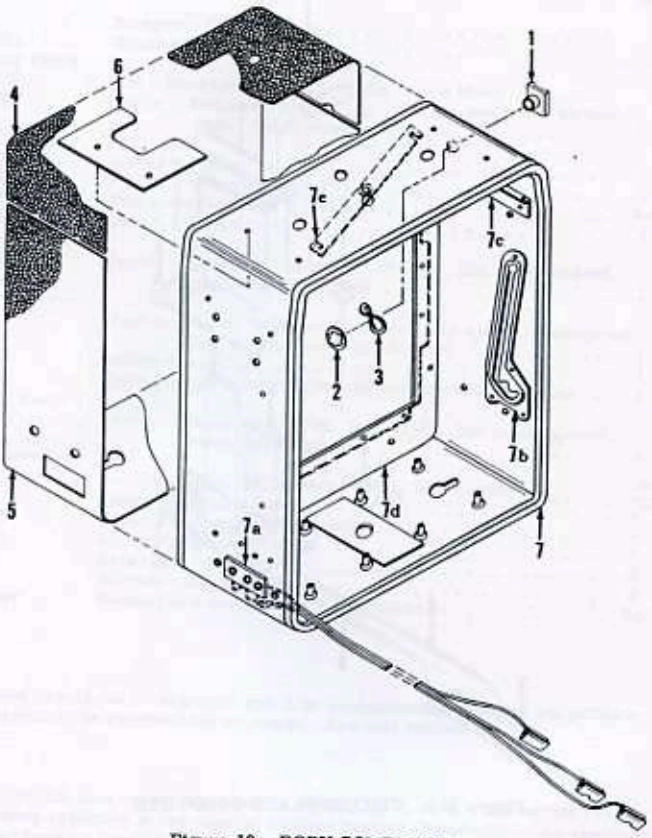

Figure 12. BODY COMPLETE

Figure and Index No.	Part Number	1 2 3 4 5	Nomenclature	Qty.
12-	36020-G1		BODY COMPLETE (up to serial no. 646124)	Ref.
-1	36024-P1	.	Guard - Shutter Release Button	1
	Attaching Parts			
-2	254-3A	.	Ring - Retaining, Waldes-Kohinoor, Inc. p/n 5105-31, steel, cadmium plate	1
-3	224-4A	.	Washer - Spring, Shakeproof p/n 3502-20-22, steel, cadmium plate	1
	---***---			
-4	36022-P1	.	Covering - Upper	1
-5	36022-P2	.	Covering - Lower	1
-6	36204	.	Insulator - Battery	1
-7	36025-G1	.	Body Assembly	1
-7a	36233-G1	. .	Receptacle Assembly	1
	Attaching Part			
	175-6-8K	. . .	Rivet - Hollow, 0.125 in. lg., 0.120 in. dia., oval head, brass, oxide black	2
	---***---			

Figure and Index No.	Part Number	1	2	3	4	5	Nomenclature	Qty.	
	36028-P1	.	.				Plate - Bed Brace, Right	1	
	Attaching Part								
	176-3-10K	.	.				Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	4	
	---***---								
12-7b	36028-P2	.	.				Plate - Bed Brace, Left	1	
	Attaching Part								
	176-3-10K	.	.				Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	4	
	---***---								
-7c	36029-P1	.	.				Support - Rangefinder Housing	2	
	Attaching Part								
	176-3-10K	.	.				Rivet - Hollow, 0.156 in. lg., 0.060 in. dia., truss head, brass, oxide black	4	
	---***---								
-7d	36032-G1	.	.				Partition Assembly	1	
	36034-P1	.	.	.			Seal - Light	1	
	36033-P1	.	.	.			Partition	NP	NHA
-7e	36030-P1	.	.				Lock - Focusing Scale	1	
	Attaching Part								
	36031	.	.				Stud - Focusing Scale Lock	1	
	---***---								
	30915-P2	.	.				Bushing - Bed Hinge (press fit)	NP	NHA
	36026-P1	.	.				Body - Camera	NP	NHA